




FSB 8 T Fluid head



Quality for (H)DV-Users: The FSB 8. The sturdy and reliable FSB 8 completes Sachtler's FSB-Range of 75mm heads, extending the payload range to 19.8 lbs (9 kg), well suited for (H)DV camcorders in industrial, newsgathering and education applications. The FSB 8 provides a 10-stage counterbalance, as well as five steps of drag (plus 0) for both tilt and pan. The fluid head is engineered with Sachtler's well-known technology, including its patented counterbalance switch mechanism.

Technical Facts

| | |
|-------------------------|--|
| Weight | 2.3 kg / 5.1lbs |
| Payload | 1 - 9 kg / 2 - 20 lbs |
| Sliding range - plate | 60 mm / 2.4" |
| Counterbalance | in 10 steps |
| Grades of drag | 5 each horizontal and vertical + 0 |
| Tilt range | +90/-70° |
| Temperature range | -40° to +60° C / -40 to +140° F |
| Camera fitting | Touch & Go® plate DV |
| Tripod/Pedestal fitting | 75 mm bowl, integrated flat base fitting |
| Pan bar(s) | 1, Type DV 75 |
| Level | self-illuminating Touch Bubble |
| Batteries Level | 1 x CR2032 |

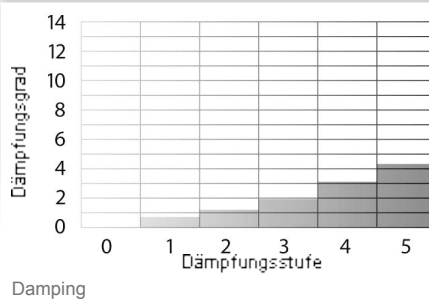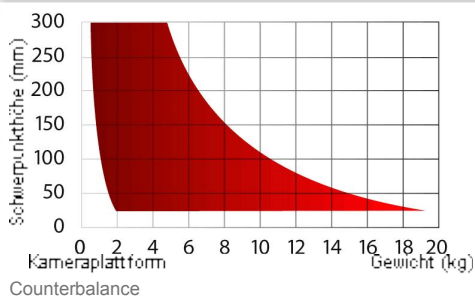

Dimensions

Further photos



Order data

| Article | Order code |
|--------------------|------------|
| FSB 8 T Fluid head | 0705 |

This product is also available in the following systems:

| Article | Order code |
|-----------------------|------------|
| System FSB 8 T | 0740 |
| System FSB 8 T / 2 D | 0741 |
| System FSB 8 T MD | 0742 |
| System FSB 8 T / 2 MD | 0743 |
| System FSB 8 T SL MCF | 0750 |

Accessories



C.O.G. plate DV



Adapter 75/100



Pan bar DV right
(telescopic)



Pan bar DV left
(telescopic)



Adapter block
FSB 6 / 8



Accessory
adapter



Accessory
adapter with
clamping

set your ideas in motion!