

Panasonic
ideas for life

AG-HMX100
Digital AV Mixer



3D

PROFESSIONAL

HD/SD and 3D Compatible Digital AV Mixer

DIGITAL AW MIXER
INTEGRATED

Live Relays with a Com Versatile HD




compact, All-in-One, Easy-to-Use, Low-Cost System. /SD Multi-Format Use, and 3D Image Switching.



picture simulated

The AG-HMX100 is a compact, all-in-one, digital AV mixer with a built-in HD/SD multi-format*¹ video switcher, audio mixer, frame synchronizer and digital effector. It serves as an audio/video switcher, adds a variety of effects, and transmits signals - all by itself. A Multi-View function displays all source images on a single monitor, while keeping the system configuration simple and clean. Users benefit from easy delivery, set-up and removal at event sites, as well as low-cost operation. Wide-ranging SDI (HD/SD), PC (DVI-I) and HDMI (HD only) inputs, versatile digital effects, and comfortable Matrix Menu operation join with advanced functions, such as control of Panasonic professional projectors,*² to configure a low-cost system that supports a wide variety of applications, from live relays and broadcasting to production. The AG-HMX100 can also operate as a 3D video switcher with dual SDI inputs.*³ By combining it with several 3D cameras and 3D projectors, it can serve as a 3D live switching system for low-cost, easy-to-use, 3D image broadcasting and production systems.

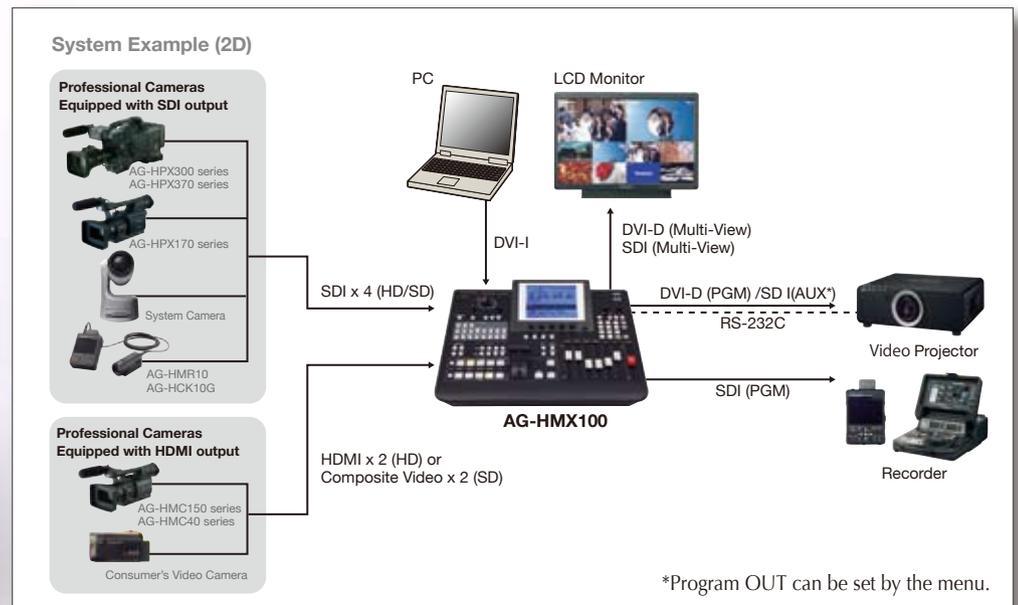

- **HD/SD multi video format compatibility.*¹**
- **Digital interfaces of SDI (HD/SD) input/output and HDMI (HD) input.**
- **DVI-I input accommodates both motion and still images from a PC.**
- **Multi-View function displays Preview (PVW), Program (PGM), and all source images on a single monitor.**
- **A waveform monitor (WFM) is built-in, and source names and audio levels are superimposed on the monitor.**
- **Remote control of power on/off and shutter on/off for the Panasonic projectors*².**
- **Supports switching of 3D images, using dual SDI inputs.*³**

*1: Mixed operation of different video formats (1080i/720p, HD/SD and 50Hz/59.94Hz) is not possible.

*2: Limited to models with an RS-232C interface. *3: Effects are not supported.

HD/SD Digital AV Mixer Functions

HD/SD Multi-Format High-Quality Image Processing

The AG-HMX100 supports 1080i/720p HD and SD images (see table below). A wipe pattern lets you switch between 16:9 and 4:3 aspect ratios. Full 4:2:2:4 digital component 12bit internal processing ensures broadcast-grade images.

Supported Video Format

Video Input	Video Format
HD (SDI/HDMI)	1080/59.94i
	1080/50i
	720/59.94p
	720/50p
SD (SDI/VIDEO)	480/59.94i
	576/50i
PC (DVI-I)	1080/60p 1920 x 1080 (60Hz)
	1080/50p 1920 x 1080 (50Hz)
	SXGA 1280 x 1024 (60Hz)
	WXGA 1280 x 768 (60Hz)
	XGA 1024 x 768 (60Hz)

* Mixed operation of different video formats (1080i/720p, HD/SD and 50Hz/59.94Hz) is not possible. PC (DVI-I) can be input to any system format, but it would be resized to match and displayed.

7 Video Inputs with PC Image Support and 6 Video Outputs

• **7 video inputs:** SDI (HD/SD switchable) x 4 channels, HDMI (HD only/HDCP and VIERA Link not supported) or video (composite) x 2 channels, and a DVI-I input capable of inputting motion or still images from a PC. This provides up to 7 channels of video input.

• **6 video outputs:** 4 SDI outputs (Program (PGM), Preview (PVW), Multipurpose (AUX), and Multi-View), and 2 DVI-D outputs (Program (PGM) and Multi-View).

Transitions and Digital Effects

• **Transitions:** Over 100 wipe patterns and mixes combine with effects like chroma keying, luminance keying, DSK, and fading. M/E preview and DSK preview are also supported.

• **Digital Effects:** Built-in digital effects include mosaic, defocus, monocolour, still, strobe, multi-strobe, decay, paint, negative and mirror. Still, strobe and multi-strobe effects allow selection of field or frame displays.



Embedded Digital Audio and Analog Audio Mixing

- **10 audio inputs:** Select up to 8 audio inputs from 4 SDI embedded audio inputs (L/R), 2 HDMI embedded audio inputs (L/R), and 4 XLR audio inputs (L/R). You can mix the 10 audio sources, including AUX input and MIC input, using a fader control.
- **Audio output:** SDI embedded audio is output from PGM, PVW, and AUX terminals, and has XLR (L/R) and pin terminal (L/R) analog outputs.
- **Audio effects:** Pan, 3 band equalizer, voice changer (pitch/level), and mute.
- **Level meter:** Displayed as a Multi-View overlay on the LCD screen.

New Multi-View Function, Built-in Waveform Monitor

The Multi-View function and Multi-View output terminal (SDI/DVI-D) provide a split display of the PVW, PGM, and all source images on a single screen. Displays of each of the input signal names and audio level meters can also be overlaid. The built-in Waveform Monitor (WFM) function displays the waveforms of video Y signals, allowing multi-channel systems to be operated with a single monitor.




Multi-View Screen (simulated image)

Matrix Menu and Rotary Switch

The large LCD panel allows easy monitoring of system status. The 5 column, 3 row matrix menu automatically displays setting items according to the operating status, so the relevant settings can be quickly checked or changed. Settings that have a large number of selections can also be quickly and intuitively displayed and set by using the rotary switch. This provides easy, comfortable settings control for the AG-HMX100's many diverse functions.

Projector Control Function

The power switch and shutter for Panasonic professional projectors can be turned on and off by RS-232C remote control. This allows convenient projector use during live events.

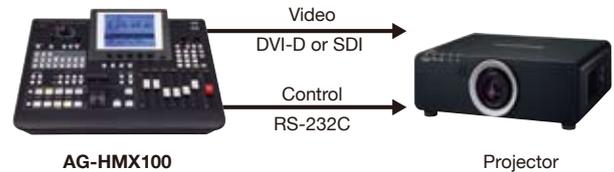

Functions for More Comfortable Operation

- **Pattern preset:** Up to 7 transition patterns and 6 key patterns can be directly registered, for retrieval with a single touch.
- **Event memory:** Records the setting conditions of the effects. Over 100 settings can be stored in memory, and instantly retrieved with pattern numbers.
- **Key learn:** Records and retrieves the key frame settings (positions/levels/modifiers) and reproduces animation effects. Up to 20 patterns can be stored in memory, with a maximum of 20 frames per pattern.
- **Joystick controller:** Enables intuitive operation of effect position setting and color correction/color selection.
- **Numerical keypad:** For setting numbers, such as pattern numbers.

Versatile Interfaces

- **Tally:** Outputs support up to eight input sources. Ideal for live relays.
- **GPI:** Visual effects including key/transition, downstream key, and fading can be externally controlled with GPI trigger signal inputs.
- **AUX output:** Select from PGM/PVW/Multiview output signals, or an SDI/HDMI input through-out signal.

Power-Saving Eco Design

- **Power-saving design:** HD images are supported, while power consumption is decreased by 15% compared to our previous SD-Type AG-MX70 model.
- **Power management:** This function automatically switches the power off when there is no input or operation for a preset period of time. Can be powered on with a secondary switch on the control panel.



AG-HMX100 Rear

3D PROFESSIONAL

A Professional HD 3D Production System

The AG-HMX100 Digital AV Mixer fully supports the Panasonic shift toward 3D world. Combined with the Panasonic AG-3DA1 Integrated Twin-Lens 3D Camera Recorder, and the 3D-compatible BT-3DL2550 Professional LCD Video Monitor, which lets you view 3D footage on-site, this professional HD 3D production system makes it easy to produce and transmit high-quality 3D images.


Supports Switched Transmission of 3D Camera Images

The AG-HMX100 can operate as a 3D video switcher with dual SDI signal inputs from 3D cameras. It comes with two pairs of inputs and one pair of outputs for 3D video signals. It is possible to configure a 3D live switching system by combining it with several 3D cameras and 3D projection systems. Both Simul and Side-by-Side 3D output methods are supported. When two AG-HMX100 units are connected, they can serve as a 3D video switcher for up to four 3D cameras.


*Only the switcher function operates. Effects such as ME cannot be used. Other functions, such as Multi-View, WFM, and title mix, are not supported. For details, visit the 3D special site. (<http://pro-av.panasonic.net/en/3d/>)

Switching specifications in 3D mode


specification 1: Simultaneous

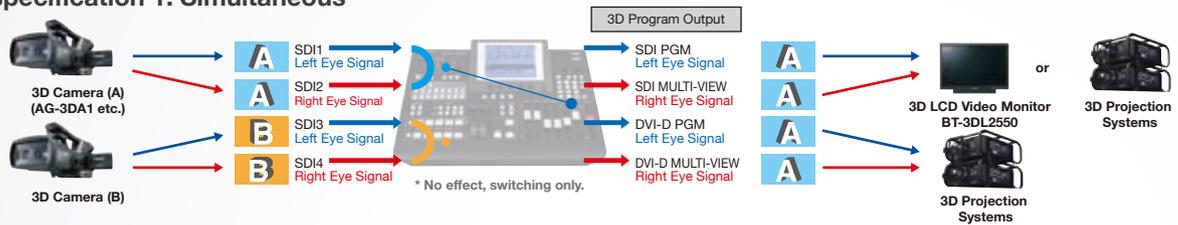

specification 1: Side-By-Side

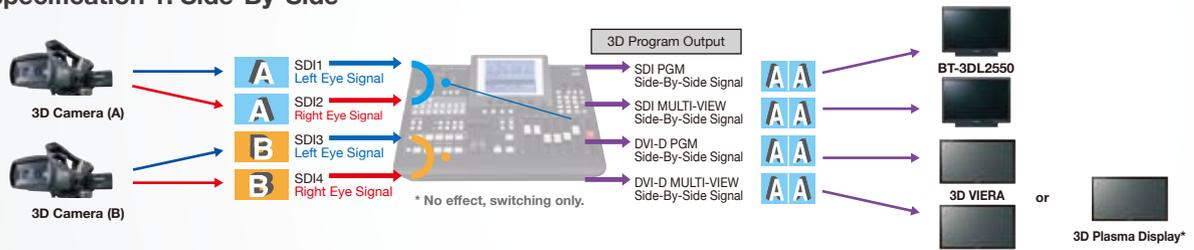

specification 1: Simultaneous

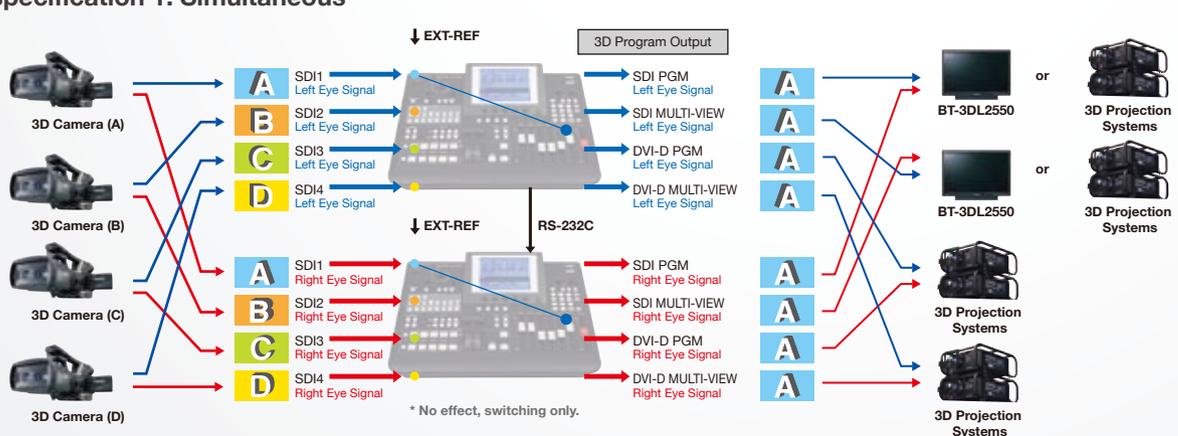

Supported signals: 1080/59.94i, 1080/50i, 720/59.94p, 720/50p, 1080/23.98psf

*3D Plasma Display is scheduled for release in Autumn of 2010. Please refer to the latest 3D Plasma Display Information at Panasonic website. < <http://panasonic.net/proplasma/> >




picture simulated

3D system configuration example


3D Live Display System

This system produces 3D live images by using two AG-3DA1 Integrated Twin-Lens 3D Camera Recorders and switching the image transmission for display on a professional DLP® projector. It is also possible to monitor the PGM image with the BT-3DL2550 3D-Compatible LCD Monitor.

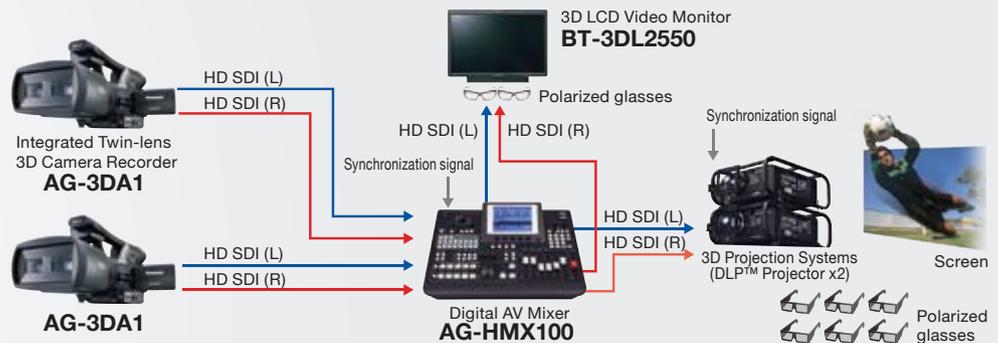

3D x 4-Input System

This 4-input switching system creates 3D content by using two P2 Mobile units to combine the images from three 3D cameras. When two AG-HMX100 units are connected, they can serve as a 3D video switcher for up to four 3D cameras. Dynamic 3D live videos can be displayed on a large screen for high-brightness, high-contrast 3D projection by using two professional DLP® projectors.

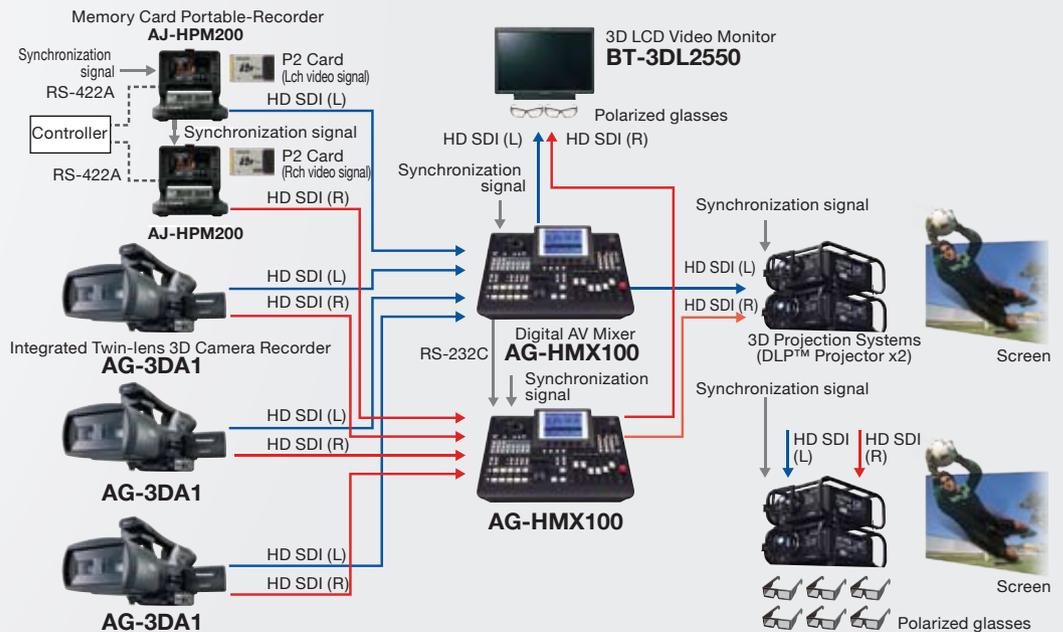

GENERAL

Power Source:	100V — 240V AC, 50 Hz/60 Hz
Power Consumption:	60 W
Operating Temperature:	5 °C to 40 °C (41 °C to 104 °C)
Operating Humidity:	10 % to 80 % (no condensation)
Storage Temperature:	-20 °C to 60 °C (-4 °C to 140 °C)
Storage Humidity:	10 % to 80 % (no condensation)
Weight:	7.9 kg (17.4 lbs)
Dimensions:	424 mm (W) x 197 mm (H) x 400 mm (D) 16-3/4 inches (W) x 7-3/4 inches (H) x 15-3/4 inches (D)

VIDEO SPECIFICATION

System Format*:	HD: 1080/23.98PsF (for 3D only) 1080/59.94i, 1080/50i, 720/59.94p, 720/50p SD: 480/59.94i, 576/50i *Mixed operation of different video formats (1080i/720p, HD/SD and 50Hz/59.94Hz) is not possible.
Sampling Frequency:	HD: Y: 74.176 MHz, Pb/Pr: 37.088 MHz (1080/59.94i, 720/59.94p, 1080/23.98PsF) Y: 74.25 MHz, Pb/Pr: 37.125 MHz (1080/50i, 720/50p) SD: Y: 13.5 MHz, Pb/Pr: 6.75 MHz
Signal Processing:	4:2:2:4, 12 bit Internal process

AUDIO SPECIFICATION

Sampling Frequency:	48 kHz
Quantization:	16 bit for HDMI Input, 24 bit for SDI Input, 20 bit for analog input
Frequency Response:	-1.0 dB/1.0 dB at 20 Hz to 20 kHz (digital) -1.0 dB/1.0 dB at 20 Hz to 20 kHz (analog)
Dynamic Range:	More than 90 dB at 1 kHz (digital), More than 85 dB at 1 kHz (analog)
THD:	Less than 0.05 % at 1 kHz (digital), Less than 0.08 % at 1 kHz (analog)
Cross Talk:	Less than -80 dB at 1 kHz, between any two channels (digital) Less than -70 dB at 1 kHz, between any two channels (analog)
Headroom:	20 dB and 18 dB switchable

VIDEO INPUT/OUTPUT

Analog composite input (VIDEO IN):	BNC x 2 sets, 1.0 V [p-p], 75 Ω termination
SDI input:	BNC x 4 sets SD serial digital signal: SMPTE259M-C/272M-A and ITU-R BT.656-4 standards HD serial digital signal: SMPTE292M/296M/299M standards
HDMI input:	HDMI connector x 2 sets (Type A connector), incompatible with HDCP Link and VIERA Link
DVI-I input:	TMDS single link (incompatible with HDCP), compatible with digital/analog RGB
Reference input:	BNC x 2 (with loop-through), 1.0 V [p-p], 75 Ω auto termination Composite signal (NTSC/PAL)
Program (PGM) output:	SDI (BNC) x 1 SD serial digital signal: SMPTE259M-C/272M-A and ITU-R BT.656-4 standards HD serial digital signal: SMPTE292M/296M/299M standards DVI-D x 1, TMDS single link (incompatible with HDCP)

Preview (PVW) output:	SDI (BNC) x 1 SD serial digital signal: SMPTE259M-C/272M-A and ITU-R BT.656-4 standards HD serial digital signal: SMPTE292M/296M/299M standards
AUX output:	SDI (BNC) x 1 SD serial digital signal: SMPTE259M-C/272M-A and ITU-R BT.656-4 standards HD serial digital signal: SMPTE292M/296M/299M standards
MULTI VIEW output:	SDI (BNC) x 1 SD serial digital signal: SMPTE259M-C and ITU-R BT.656-4 standards HD serial digital signal: SMPTE292M/296M standards DVI-D x 1, TMDS single link (incompatible with HDCP)
Advanced reference output (ADV-REF):	BNC x 1, 75 Ω Composite signal Sync: 0.286 V [p-p] (NTSC) /0.3 V [p-p] (PAL) Burst: 0.286 V [p-p] (NTSC) /0.3 V [p-p] (PAL)

AUDIO INPUT/OUTPUT

Audio input (AUDIO IN):	XLR: 4 sets (L and R), 4/0/-3 dBm switchable, balanced, 10 kΩ SDI (BNC) (Embedded Audio): 4 sets SD serial digital signal: SMPTE259M-C/272M-A and ITU-R BT.656-4 standards HD serial digital signal: SMPTE292M/296M/299M standards HDMI (Embedded Audio): connector x 2 sets (Type A connector), incompatible with HDCP and VIERA Link
AUX input:	Pin jack x 1 (L and R), -10 dBV, High impedance, unbalanced
Microphone input (MIC):	M6 x 1, -60 dBV, 2 kΩ, monaural, unbalanced
Audio output (AUDIO OUT):	Program (PGM) output: XLR x 1 (L and R), 4/0/-3 dBu switchable, Low impedance, balanced SDI (BNC) (Embedded Audio) x 1 SD serial digital signal: SMPTE259M-C/272M-A and ITU-R BT.656-4 standards HD serial digital signal: SMPTE292M/296M/299M standards Pin jack x 1 (L and R), -10 dBV, Low impedance, unbalanced
Preview (PVW) output:	SDI (BNC) (Embedded Audio) x 1 SD serial digital signal: SMPTE259M-C/272M-A and ITU-R BT.656-4 standards HD serial digital signal: SMPTE292M/296M/299M standards
AUX output:	SDI (BNC) (Embedded Audio) x 1 SD serial digital signal: SMPTE259M-C/272M-A and ITU-R BT.656-4 standards HD serial digital signal: SMPTE292M/296M/299M standards
Headphones output (PHONES):	M6 x 1, 8 Ω, stereo, unbalanced, ∞ dBu to -20 dBu
OTHER PORT	TALLY: D-sub 9 pin, Open-Collector x 8 CH Maximum Current: Less than 50 mA, Maximum Voltage: 35 VDC GPI: BNC x 1, Make-Contact RS-232C: D-sub 9 pin x 1

Weight and dimensions shown are approximate. Specifications are subject to change without notice.

Please refer to the latest Digital AV Mixer Information at Panasonic website.



<http://pro-av.panasonic.net/>

Panasonic®

Panasonic Corporation
Systems Business Group
2-15 Matsuba-cho, Kadoma, Osaka 571-8503
Japan
Phone +81 6 6901 1161 Fax +81 6 6908 5969
<http://pro-av.panasonic.net/>

[Countries and Regions]

Argentina	+54 1 308 1610	Kuwait	+96 522431385	Switzerland	+41 (0) 41 259 96 32
Australia	+61 2 9986 7400	Lebanon	+96 11665557	Syria	+963 11 2318422/4
Bahrain	+973 252292	Malaysia	+60 3 7809 7888	Taiwan	+886 2 2227 6214
Belgium	+32 (0) 2 481 04 57	Mexico	+52 55 5488 1000	Thailand	+66 2 731 8888
Bulgaria	+359 2 946 0786	Montenegro, Serbia	+41 (0) 26 466 25 20	Turkey	+90 216 578 3700
Brazil	+55 11 3889 4035	Netherlands	+31 73 64 02 577	U.A.E. (for all Middle East)	+971 4 8862142
Canada	+1 905 624 5010	New Zealand	+64 9 272 0100	Ukraine	+380 44 4903437
China	+86 10 6515 8828	Norway	+47 67 91 78 00	U.S.A.	+44 (0)1344 70 69 20
(Hong Kong	+852 2313 0888)	Pakistan	+92 5370320 (SNT)	Vietnam	+1 877 803 8492
Czech Republic	+420 236 032 552/511	Palestine	+972 2 2988750		+848 38370280
Denmark	+45 43 20 08 57	Panama	+507 229 2955		
Egypt	+20 2 23938151	Peru	+51 1 614 0000		
Finland, Latvia, Lithuania, Estonia	+358 (9) 521 52 53	Philippines	+63 2 633 6163		
France	+33 (0) 1 55 93 66 67	Poland	+48 (22) 338 1100		
Germany, Austria	+49 (0)611 235 0	Portugal	+351 21 425 77 04		
Greece	+30 210 96 92 300	Puerto Rico	+1 787 750 4300		
Hungary	+36 (1) 382 60 60	Romania	+40 21 211 4855		
India	+91 120 247 1000	Russia & CIS	+7 495 9804206		
Indonesia	+62 21 385 9449	Saudi Arabia	+96 626444072		
Iran		Singapore	+65 6270 0110		
(Vida)	+98 21 2271463	Slovak Republic	+421 (0) 2 52 92 14 23		
(Panasonic Office)	+98 2188791102	Slovenia, Croatia, Bosnia, Macedonia	+44 (0) 20 76 63 36 57		
Italy	+39 02 6788 367	South Africa	+27 11 3131622		
Jordan	+962 6 5859801	Spain	+34 (93) 425 93 00		
Kazakhstan	+7 727 298 0891	Sweden	+46 (8) 680 26 41		
Korea	+82 2 2106 6641				



JQA-0443



Factories of Systems Business Group have received ISO14001:2004-the Environmental Management System certification. (Except for 3rd party's peripherals.)