

Ideal for supporting **ENG** dockable camcorders or **EFP** cameras equipped with long focal lenses and top mounted viewfinders, the **DELTA** is manufactured with an extensive use of ultra-light magnesium alloy.

The fully variable counterbalance system is designed to accommodate offset payloads of 22 Kg (48 lbs) ensuring excellent performances at any tilt angle.


The **DELTA features a continuously adjustable fluid damping mechanism** providing extremely smooth and precise camera movements.

Standard performances of +70, -60 degrees, with the European style quick attachment camera plate, can be increased to +/- 90 ° with the optional sliding base plate.

Powered by a 9v battery, two digital displays indicate the counterbalance and tilt drag values, while an illuminated spirit level allows easy set-up even in low light conditions.

■ specifications

Payload capacity at:	
150 mm (6")	17 Kg (37 lbs)
100 mm (4")	22 Kg (49 lbs)
Weight:	3,5 Kg (7.7 lbs)
Pan range:	360°
Tilt range: +/- 90° with sliding base plate	
+70°/-60° with quick attachment plate	
Counterbalance:	Continuous
Fluid drag:	Continuous
Bowl diameter:	100 mm
Temp. range:	-40°/+60°C (-40°/+140°F)

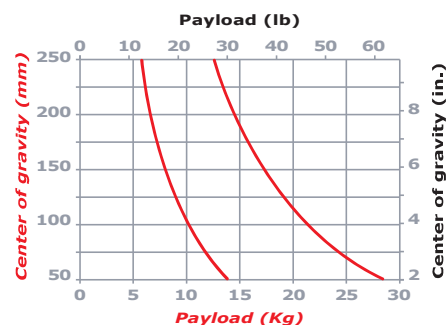

accessories ■

