




L04025DP

## Daylight Par 4kW/2.5kW

### ■ SPECIFICATIONS

Identity No.	L04025DP
Capacity	4,000W / 2,500W
Lamp Bulb Voltage	200V / 115V
Protective Lens	Ø335mm (13-1/8 in.)
Par Lens	Ø300mm (11-3/4 in.)
Weight (without barndoor)	19.6 kg
Weight (with barndoor)	22.1 kg
Lamp Type	HMI 4kW/2.5kW SE 5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	10 m
Min. Distance to Flammable Object	1 m
Operating Range	45° - 0° - 45°

### ■ DIMENSIONS (mm)

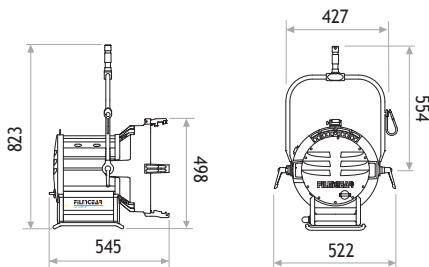

### ■ PHOTOMETRIC DATA

		Distance	10m	15m	20m			Distance	10m	15m	20m
<b>4000W</b>						<b>2500W</b>					
Spot (8°)	Lux		57318	25474	14329	Spot (8°)	Lux		54288	24128	13572
	Beam Ø		1.40 m	2.10 m	2.08 m		Beam Ø		1.40 m	2.10 m	2.80 m
Medium Flood (10° x 20°)	Lux		22574	10033	5643	Medium Flood (10° x 20°)	Lux		17827	7923	4457
	Beam Ø		1.75 x 3.53 m	2.62 x 5.29 m	3.50 x 7.05 m		Beam Ø		1.75 x 3.53 m	2.62 x 5.29 m	3.50 x 7.05 m
Wide Flood (20° x 45°)	Lux		7838	3479	1957	Wide Flood (20° x 40°)	Lux		3384	1504	846
	Beam Ø		3.53 x 8.28 m	5.29 x 12.43 m	7.05 x 16.56 m		Beam Ø		3.53 x 7.28m	5.29 x 10.92 m	7.05 x 14.46 m
Super Wide Flood (40°)	Lux		4040	1976	1010	Super Wide Flood (30°)	Lux		2677	1190	669
	Beam Ø		7.28 m	10.92 m	14.46 m		Beam Ø		5.36 m	8.04 m	10.72 m
Frosted Super Flood (36°)	Lux		2677	1190	669	Frosted Super Flood (35°)	Lux		1326	589	332
	Beam Ø		6.50 m	9.75 m	13.00 m		Beam Ø		6.31 m	9.46 m	12.61 m

### ■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø335mm (13-1/8 in.) Protective Lens
- Set of 5 Par Lenses Ø300mm (11-3/4 in.) with Frames
- Lens Case
- GX38 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

### ■ ACCESSORIES

- 6kW/4kW/2.5kW Electronic Ballast
- 4kW/2.5kW Electronic Ballast
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø300mm (11-3/4 in.) with Frames :
  - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrim Ø394mm (15-1/2 in.) :
  - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire