




KOSMOS 400 color location

ref: VK400C


Includes: manual yoke with Euro28 junior pin, power cord with Neutrik PowerCon TRUE1 connector

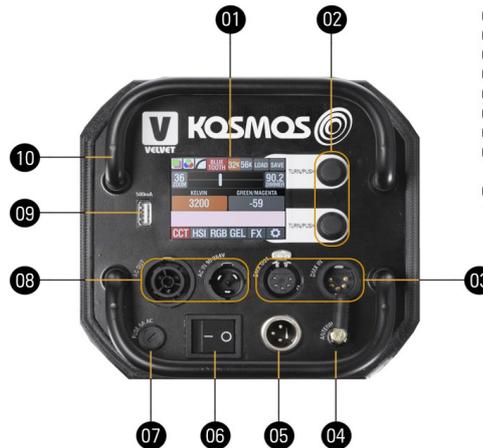

- 01 Digital display
- 02 Rotary selector buttons
- 03 2x XLR-5 (DMX IN and DMX OUT)
- 04 Antenna
- 05 XLR-3 DC in 26-48V connector
- 06 Main power switch
- 07 8A fuse
- 08 2x PowerCon TRUE1 TOP in and through connectors
- 09 USB connector
- 10 2x handles and security cable attachment

TECHNICAL SPECIFICATIONS

OPTICAL SYSTEM	motorized ZOOM Fresnel + changeable lampheads
LIGHT APERTURE	glass Fresnel lens 300mm / 12"
BEAM ANGLE	13° to 56° (half peak), motorized zoom with stepper motor
LIGHT INTENSITY	smooth 0 to 100%, four selectable dimming curves
COLOR TEMPERATURE	continuously adjustable from 2500K to 10000K
GREEN-MAGENTA	continuously adjustable (full Plusgreen to full Minusgreen)
COLOR RENDITION	typical 95 CRI / 95 TLCI
HIGH SPEED	over 12,000 fps
LIGHT ENGINE	35mm full color spectrum R+G+B+W+CW VELVET ceramic LED
COLOR CONTROL MODES	CTT mode, HSI mode, CTT+RGB mode, GELS mode, EFFECTS mode with ZOOM in every mode NOTE: base Kelvin white light can be set combined with any color
CONTROL (LOCAL)	2x rotary dials and full-color touchscreen display
CONTROL (WIRE)	Full DMX-RDM with XLR-5 IN & OUT connectors
CONTROL (WIRELESS)	LumenRadio CRMX, Wi-Fi Art-Net sCAN and Bluetooth, Android and IOS free VELVET Goya App
INTERFACE	TFT full-color display with touchscreen, 2 rotary dials with pushbutton
DIMENSIONS	495 x 320 x 320 mm / 19.5" x 12.5" x 12.5"
DIMENSIONS with yoke	495 x 455 x 320 mm / 19.5" x 17.9" x 12.6"
FIXTURE WEIGHT	9.3 kg / 20.5 lbs fixture - 9.8 kg / 22.6 lbs fixture + yoke
POWER	400W (3.7 Amps at 110 VAC) with PFC
AC INPUT VOLTAGE	90-264V AC 50/60Hz PowerCon TRUE1 TOP in & through
DC INPUT VOLTAGE	26-48V DC XLR-3 in connector
LED RATED LIFE (L70)	exceeds 50,000 hours
COOLING	VELVET proprietary aerospace-grade sealed 3D chamber cooling system with silent fan
PROTECTION	IP22, indoor or outdoor protected use
CONSTRUCTION AND FINISH	fixture and yoke made of die-cast aluminum
RIGGING OPTIONS	aluminum yoke with universal junior 1-1/8" (28mm) outer diameter combined with baby receiver 5/8" (16mm), pole operated yoke

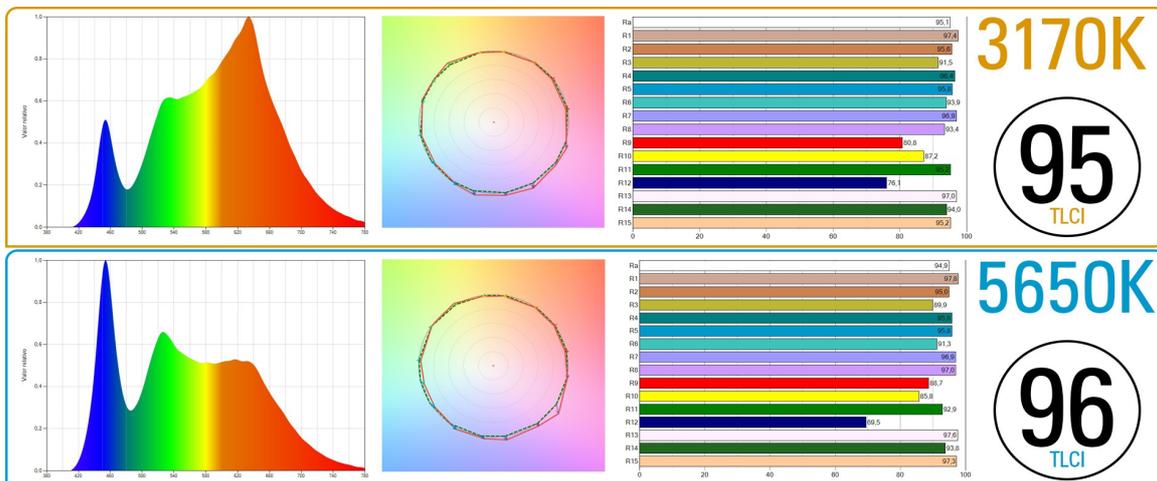



KOSMOS 400 color location

ref: VK400C

Includes: manual yoke with Euro28 junior pin, power cord with Neutrik PowerCon TRUE1 connector

