MARS 400S PRO

Contact us Buy now

MARS 400S PRO
Awaken The Power
E101010
CH2
1080P60
Support

BRAND-NEW
DESIGN

0.08S
LOW LATENCY

MULTIPLE FAN
MODES

DIRECT VIDEO
FOR LIVE STREAM

OPTIMIZED
MONITORING FEED

MULTIPLE
POWER OPTIONS

CHANNEL SCAN
FIRMWARE UPDATE ON APP

E101010
CH2
8.1v
1080P60
TRANSMITTER
MARS 400S PRO

400FT
0.08S
E101010
CH2
8.1v
1080P60
TRANSMITTER
MARS 400S PRO

USB 5-12V
ON/OFF
HDMI OUT
6-16V DC
SDI OUT

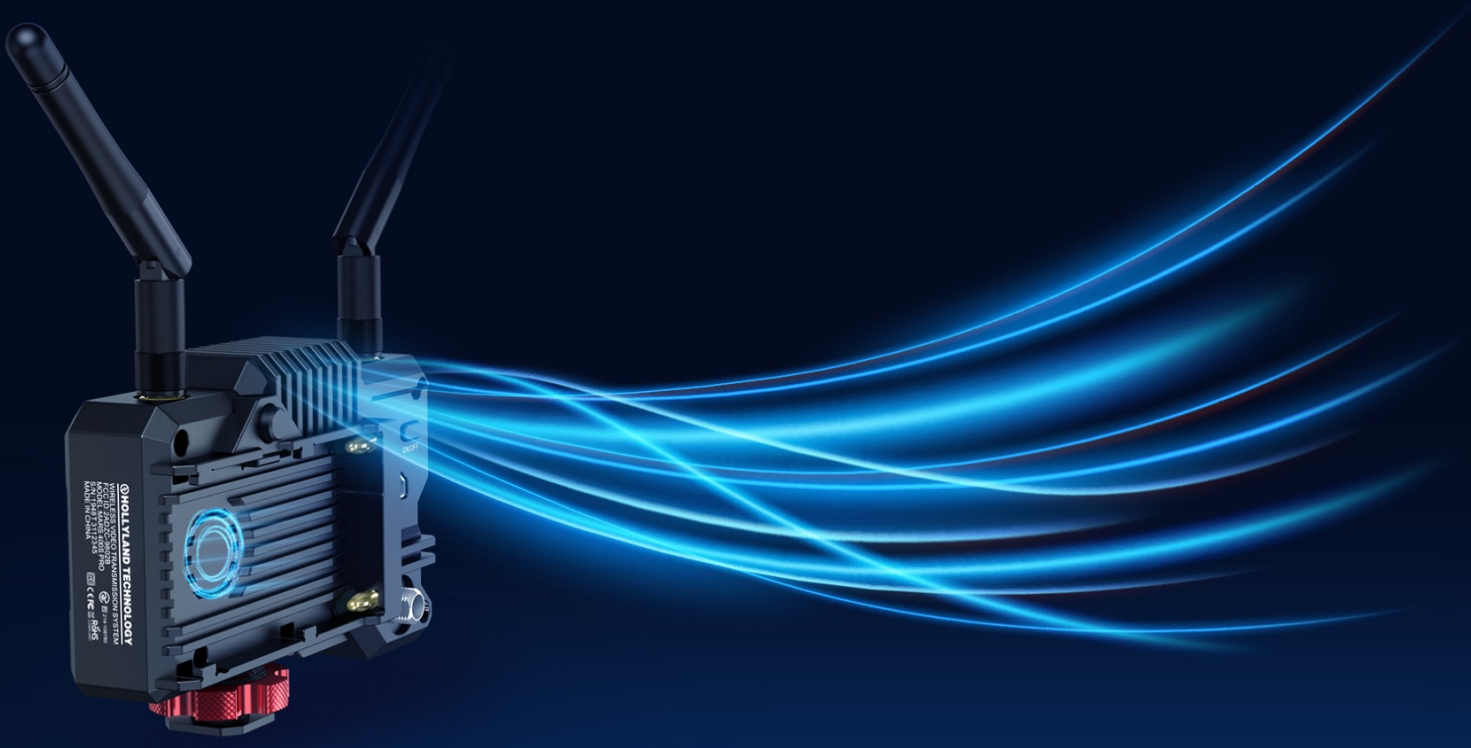
HOLLYLAND TECHNOLOGY

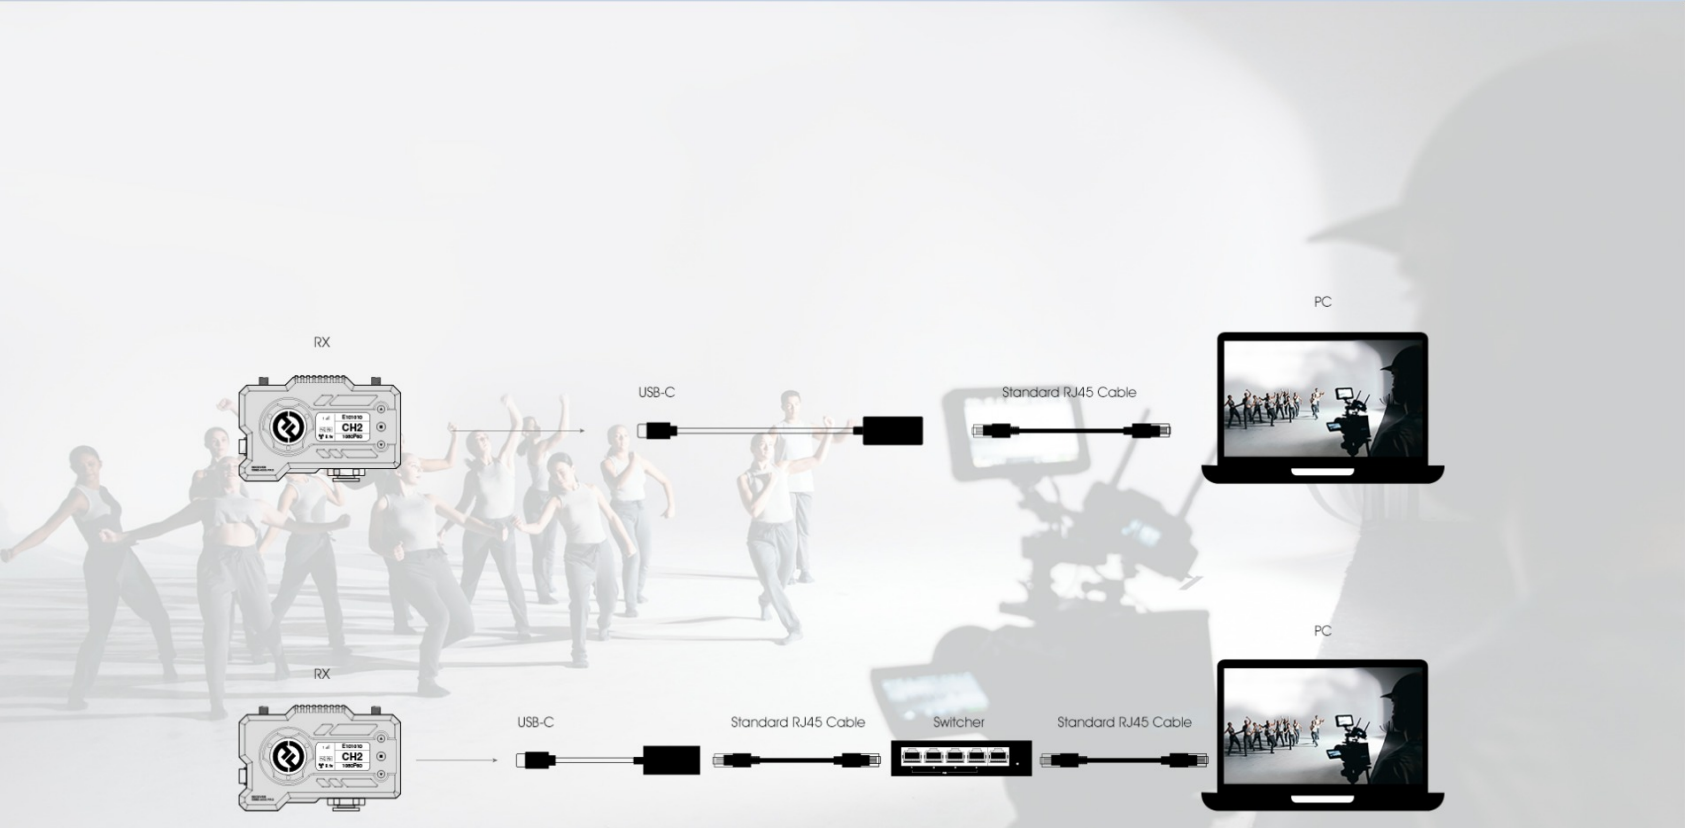
RX
USB-C
Standard RJ45 Cable
PC
RX
USB-C
Standard RJ45 Cable
Switcher
Standard RJ45 Cable
PC

E101010
CH2
1080P60

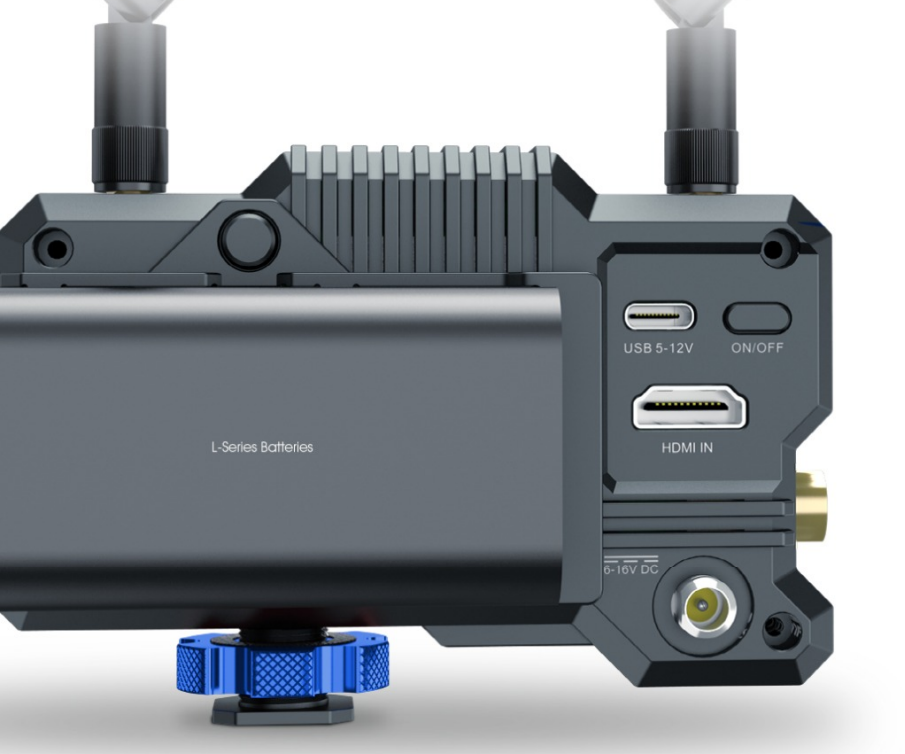
USB 5-12V
ON/OFF
HDMI IN
L-Series Batteries
6-16V DC

5~12V Type-C
6~16V DC Power

Tools
WFM
HIST
Focus
Zebra
Frame
Magnify
FalseColor
MomoColor
3D LUT

E101010
CH2
1080P60
8.1V
TRANSMITTER
MARS 400S PRO

Firmware Update

Downloading Firmware. Keep Network Connected. Do not Close APP

Downloading:100%

Start Update



TRANSMITTER

① Antenna Interface
② Fan Air Outlet
③ SDI Input
④ OLED Display Screen
⑤ UP
⑥ OK
⑦ DOWN
⑧ Cold Shoe
⑨ USB Type-C Interface
⑩ Power Switch
⑪ HDMI Input
⑫ DC Input



RECEIVER

① Antenna Interface
② Fan Air Outlet
③ SDI Output
④ OLED Display Screen
⑤ UP
⑥ OK
⑦ DOWN
⑧ Cold Shoe
⑨ USB Type-C Interface
⑩ Power Switch
⑪ HDMI Output
⑫ DC Input

	Transmitter	**Receiver**
Interfaces	HDMI Input (Type A Female) SDI Input 2* Antenna Interfaces (RP-SMA Male) DC Input USB Type-C	HDMI Output (Type A Female) SDI Output 2* Antenna Interfaces (RP-SMA Male) DC Input USB Type-C
Supply Interfaces	DC Power Input:6-16V USB Type-C Power Supply: 5V/2A Battery Power Supply: 6-16V DC	DC Power Input: 6-16V USB Type-C Power Supply: 5V/2A Battery Power Supply: 6-16V DC

Power Consumption	<11W	<7W
Weight	206g	206g
Dimension	(L*W*H): 110*72*33.5mm (The Battery Plate Excluded)	(L*W*H): 110*72*33.5mm (The Battery Plate Excluded)
Input / Output Video Format	HDMI: 480p60 576p50 720p50/59.94/60 1080i50/59.94/60 1080p23.98/24/25/29.9/30 1080p50/59.94/60 SDI: 1080p60/59.94/50(Level A) 1080p60/59.94/50(Level B) 1080i60/59.94/50 1080p30/29.97/25/24/23.98 1080PsF25 720p60/59.94/50 1080PsF24/23.98	HDMI: 480p60 576p50 720p50/60 1080i50/60 1080p24/25/30 1080p50/60 SDI: 1080p60/50(Level A) 1080i60/50 1080p30/25/24 720p60/50 1080i50(1080PsF25/24/23.98input) 1080i60(1080PsF30/29.97input)
Frequency	5GHz	5GHz
Modulation Mode	OFDM	OFDM
Transmission Power	Maximum 21dBm	/
Receiver Sensitive	/	- 80dBm
Transmission Latency	0.08s	0.08s
Bandwidth	20MHz	20MHz



Transmitter x1



Receiver x1

Antenna x5

DC Adapter x1



User Guide x1

Shenzhen Hollyland Technology Co., Ltd. Copyright © All rights reserved 粤ICP备17070038号 Powered By ：LY-Network