




L02500DS

Daylight Fresnel 2500W SE


■ SPECIFICATIONS

| | |
|-------------------------------------|--------------------------|
| Identity No. | L02500DS |
| Capacity | 2,500W |
| Lamp Bulb Voltage | 115V |
| Fresnel Lens | Ø250mm (9-7/8 in.) |
| Weight (without barndoor) | 17.1 kg |
| Weight (with barndoor) | 18.8 kg |
| Lamp Type | 2500W SE 5600K |
| Lamp Holder | G38 |
| Stirrup | Ø28mm (1-1/8 in.) Spigot |
| Class / IP Rating | 1 / 23 |
| Max. Surface Temp. | 160 °C |
| Max. Ambient Temp. | 45 °C |
| Min. Distance to Illuminated Object | 3.5 m |
| Min. Distance to Flammable Object | 1 m |
| Operating Range | 45° - 0° - 45° |

■ DIMENSIONS (mm)

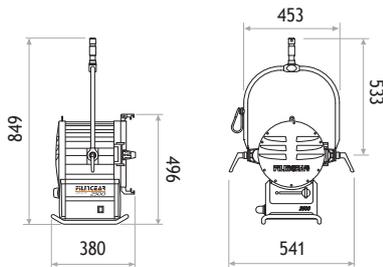

■ PHOTOMETRIC DATA

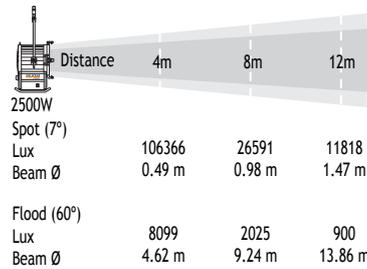

■ PACKAGE CONTENT

- Aluminium Lamp Housing with 4-leaf Rotatable Barndoor with Safety Wire
- Ø300mm (11-3/4 in.) Fresnel Lens
- G38 Lampholder
- Igniter
- Cable with Multipin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

■ ACCESSORIES

- 4kW/2.5kW Electronic Ballast with Multi-Voltage
- 4kW/2.5kW Electronic Ballast
- 2500W Electronic Ballast with Multi-Voltage
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrim Ø330mm (13 in.) :
 - Full Single Scrim
 - Full Double Scrim
 - Half Single Scrim
 - Half Double Scrim
- Carrying Bag for Scrim Set
- Safety Wire