


Daylight Fresnel 1200W SE




■ SPECIFICATIONS

Identity No.	L01200DS
Capacity	1,200W
Lamp Bulb Voltage	100V
Fresnel Lens	Ø175mm (6-7/8 in.)
Lamp Type	MSR 1200HR or HMI 1200W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	180 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	6 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	9.7 kg
Weight (with barndoor)	10.7 kg

■ DIMENSIONS (mm)

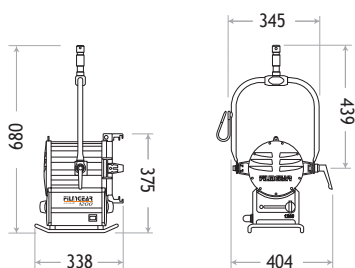

■ PHOTOMETRIC DATA

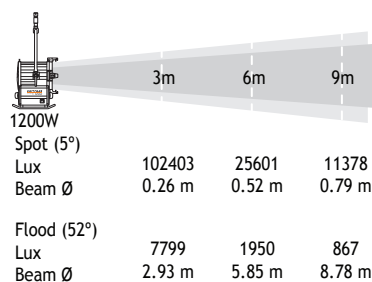

■ LAMPHEAD CONTENTS

Lamp Housing without Bulb (purple grey & silver color)

4-leaf Rotatable Barndoor with Safety Wire

Ø175mm (6-7/8 in.) Fresnel Lens

Inlet Cable with Multi-Pin Connector

Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

■ ACCESSORIES

Electronic Ballast V3 : 1.8kW/1.2kW/575W or 1.2kW/575W

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø229mm (9 in.) : Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)