

COMPARISON WITH OTHER PANELS

- ▶ rainproof and shock resistant aluminum body
- ▶ 25% more light output with much wider beam
- ▶ best quality Osram LED
- ▶ beauty soft shadowless light
- ▶ more than bi-colour 3000K to 6000K
- ▶ digital display with shock resistant buttons
- ▶ perfect color rendition & consistency lamp to lamp
- ▶ professional DMX RDM with XLR-5 connector
- ▶ wide power input 12-35 VDC / 90-264 VAC
- ▶ affordable European quality
- ▶ two years warranty 100% made in Barcelona (Spain)



www.thelight.com.es

info@thelight.com.es

Intellectual Property

THELIGHT VELVET light technology is protected under spanish patents and international patents pending

2014 © Copyright THELIGHT. All rights reserved.

the most robust & advanced LED panel

VELVET
LIGHT



RAINPROOF

Rocky body 100% aluminum

SOFT LIGHT

Natural shadow-less light

POWERFUL


210 Lux at 3m / 10 ft

THELIGHT

the unique aLL-in-one Light



THELIGHT introduces **Rainproof VELVET LIGHT 1** the most robust and advanced LED panel producing velvety soft light

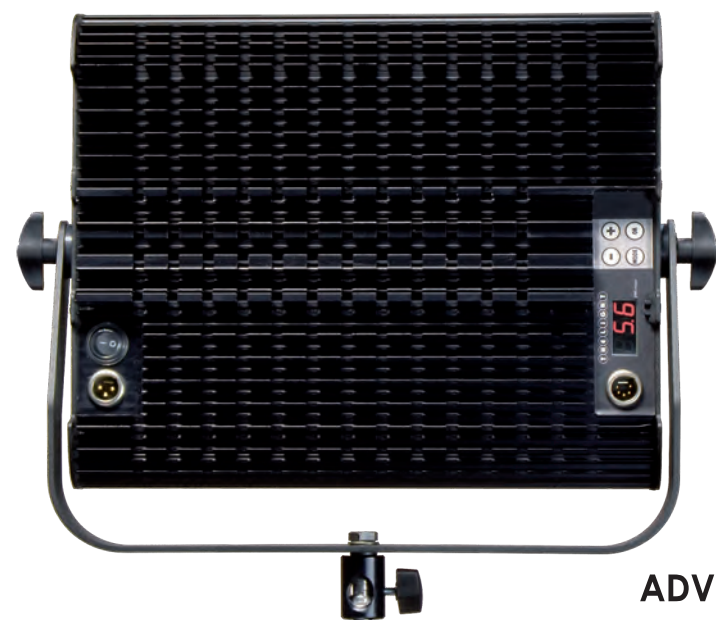

MADE TO LAST

Rainproof IP54

Robust 100% aluminum body made to endure the tougher working conditions on any location or studio

Best quality OSRAM LED

THELIGHT electronics and the aluminum heatsink keep the LED in the optimum temperature to last beyond 50.000 hours

ADVANTAGES

- ▶ Rainproof and shock resistant aluminum body
- ▶ More than bi-colour 3000K to 6000K
- ▶ Best quality Osram LED
- ▶ Natural shadowless light
- ▶ High output 210 Lux at 3m
- ▶ Worldwide AC & DC powered
- ▶ On-board and DMX control
- ▶ Thin and portable
- ▶ Modular design for multipanel
- ▶ Flicker free up to 3000 fps
- ▶ Silent fan-free operation
- ▶ 100% Made in Barcelona (Spain)



VELVET LIGHT 1 includes:

- ▶ 100% aluminum IP54 rainproof LED panel
- ▶ On-board and DMX digital control over:
 - ▶ Color temperature from 3000K to 6000K
 - ▶ smooth Flicker-free dimming 0 to 100
- ▶ XLR-3 input for battery power 12-35VDC
- ▶ XLR-5 input connector for remote DMX control
- ▶ adjustable yoke with combined 28 / 16mm pin
- ▶ two years warranty

NATURAL SOFT LIGHT

Incredibly soft and wraparound quality light to easily get beauty shots and natural portraits

MORE THAN BI-COLOR

VELVET is more than tungsten & daylight in the same unit: you can adjust color temperature from 3000K to 6000K

AC/DC POWERED

VELVET is always ready to operate worldwide: using any battery from 12 to 35 VDC with **Vlock or Gold battery mount** with universal **AC power 90-264 VAC**

QUALITY WHITE LIGHT

CRI 95 to get perfect skin tones and real colors with any HD or photo camera

Professional and consistent color rendition

Absolutely consistent lamp to lamp to mix as many units as you wish and get exactly the same light quality and color reproduction

QUICK SETUP

on-board control, digital display and **shock resistant buttons** color temperature **instantly adjustable** from 3000K to 6000K dimmer smooth and flicker-free 0 to 100 with no color shift

ADVANCED DMX RDM

bi-directional DMX remote control even without a controller! **Master-slave function:** link several units and operate without console. The Master will be the controller for the others units

TECHNICAL SPECIFICATIONS

VELVET 1

COLOR TEMPERATURE	digitally adjustable from 3000K to 6000K
LIGHT INTENSITY	dimnable 0 to 100 (smooth and flicker-free)
DIMENSIONS	370 x 308 x 68 mm
WEIGHT	3,2 Kg
POWER DRAW	75 W
POWER SUPPLY	12-35V DC via XLR-3 14,4V DC Vlock or Gold mount battery plate 90-264V AC 50/60Hz
PHOTOMETRICS	1700 Lux / 157 fc at 1m / 3 feet 210 Lux / 19 fc at 3m / 10 feet
BEAM ANGLE	100°
LED RATED LIFE	more than 50.000 hours
COOLING	no noise, fan-free passive cooling
PROTECTION & CONSTRUCTION	rainproof IP54 rated, made of black anodized extruded aluminum and black powder coated sheet aluminum
VELVET LED TECHNOLOGY	OSRAM selected BIN LED + optic diffuser + CPU software control
QUICK MOUNTING ACCESSORIES	AC power supply, Vlock or Gold adapter, foldable Snapgrid 40°, pole-op yoke, multipanel yokes, removable barn doors, DMX splitter cable, hard case, Cordura soft case



Specifications subjects to change without notice